

HD 5/15 C PLUS

Practical, mobile, versatile: the HD 5/15 C Plus cold water high-pressure cleaner for vertical and horizontal operation. With accessory storage, brass cylinder head and automatic pressure relief.





1.520-931.0

- Automatic pressure relief
- For horizontal and vertical operation
- Save time and effort: EASY!Force high-pressure gun and EASY!Lock quick-release couplings.

| Technical data | | _ |
|---------------------------|-------------|-----------------|
| EAN code | | 4054278164595 |
| Supply voltage | Ph / V / Hz | 1 / 230 / 50 |
| Flow rate | l/h | 500 |
| Inlet temperature | °C | 60 |
| Working pressure | bar / MPa | 150 / 15 |
| Max. pressure | bar / MPa | 200 / 20 |
| Connection load | kW | 2.8 |
| Connection cable | m | 5 |
| Nozzle size | mm | 32 |
| Weight (with accessories) | kg | 26.1 |
| Weight incl. packaging | kg | 28.5 |
| Dimensions (L × W × H) | mm | 380 × 360 × 930 |

| Equipment | | |
|----------------------------------|----|--------------------|
| Spray gun | | EASY!Force |
| High-pressure hose | m | 10 / DN 6, 250 bar |
| Spray lance | mm | 840 |
| Triple nozzle (0°/ 25°/40°) | | manual |
| Dirt Blaster | | • |
| Cleaning agent function | | Suction |
| Pressure switch-off | | • |
| Included in the scope of supply. | | |

HD 5/15 C Plus, 1.520-931.0, 2023-01-01





Save time and effort: EASY!Force high-pressure gun and EASY!Lock quick-release couplings.

- Fatigue-free work at last: the EASY!Force high pressure gun.
- EASY!Lock quick-release couplings: durable and robust. And five times faster than screws.



Portability

- Integrated carrying handle on the front of the machine enables easy loading and convenient transport.
- Push handle can be retracted at the push of a button.
- Compact construction style.



Flexibility

- Vertical and horizontal operation possible.
- The wheels are not on during horizontal operation. As such, the machine offers maximum stability.
- Separate park and transport position for the spray unit.

ACCESSORIES FOR HD 5/15 C PLUS 1.520-931.0



| | | Order no. | Description | |
|--|----|-------------|--|--|
| TRIGGER GUNS | | | | |
| Spray guns | | | | |
| EASY!Force Advanced | 1 | 4.118-005.0 | Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero. | |
| EASY!Force conversion kit 1 - from high-pressure hose | 2 | 4.111-050.0 | For retrofitting Kärcher high-pressure cleaners with existing high-pressure hose: EASY!Force conversion kit 1 with EASY!Force high-pressure gun, spray lance and all adapters through to the nozzle. | |
| EASY!Force conversion kit 2 - from machine | 3 | 4.111-051.0 | Developed for retrofitting existing high-pressure cleaners from Kärcher: EASY!Force conversion kit 2 with EASY!Force high-pressure gun, spray lance, high-pressure hose and necessary adapters. | |
| EASY!Force conversion kit 3 - high-pressure gun | 4 | 4.111-052.0 | Compatible with existing high-pressure hose and spray lance: EASY!Force conversion kit 3, incl. EASY!Force trigger gun and all necessary adapters for upgrading your high-pressure cleaner. | |
| SPRAY LANCES | | | | |
| Rotating spray lances | | | | |
| Spray lance, 840 mm, rotatable | 5 | 4.112-006.0 | 850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. | |
| LED nozzle light | 6 | 2.680-002.0 | Bright, lightweight LED work light for direct mounting on spray lance of EASY!Force high-pressure gun. Better view in unfavourable lighting conditions for up to 5 working hours. | |
| Spray lance, 250 mm, rotatable | 7 | 4.112-027.0 | Spray lance, 250 mm, rotatable, ergonomic | |
| Spray lance, 400 mm, rotatable | 8 | 4.112-024.0 | Spray lance, 400 mm, rotatable, ergonomic | |
| Spray lance, 600 mm, rotatable | 9 | 4.112-007.0 | 600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. | |
| Spray lance, 1050 mm, rotatable | 10 | 4.112-000.0 | 1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. | |
| Spray lance, 1550 mm, rotatable | 11 | 4.112-018.0 | 1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. | |
| Spray lance, 2050 mm, rotatable | 12 | 4.112-021.0 | 2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. | |
| Spray lance extender, 1000 mm | 13 | 4.112-048.0 | Spray lance extension with EASY!Lock connection. Length 1000 mm. | |
| Double lance | | | | |
| Double lance, 960 mm | 14 | 2.112-016.0 | 960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use (e.g. stable cleaning). | |

■ Included in the scope of supply. □ Available accessories.

ACCESSORIES FOR HD 5/15 C PLUS 1.520-931.0



| | | Order no. | Description | |
|---|------|-------------|---|---|
| SPRAY LANCES | | | | |
| Angular spray lance | | | | |
| Spray lance for toilets and rain gutters | 15 | 4.112-029.0 | Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets. | |
| Flexible spray lance | | • | | |
| elexible lance, 1050 mm | 16 | 4.112-035.0 | 1050 mm flexible lance with variable bend from 20° to 140° , ideal for cleaning difficult to reach areas, e.g. gutters. | |
| High pressure articulated joint | 17 | 4.112-057.0 | For hard-to-reach areas: High-pressure articulated joint with infinite angle adjustment up to 120°. Simply attach directly to the spray lance of the pressure washer. | |
| Gutter cleaner | | | | - |
| Gutter cleaning lance | 18 | 2.112-015.0 | The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates. | |
| Undercarriage spray lance | | | | |
| Jnderbody lance | 19 | 4.112-032.0 | Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle. | |
| Additional handle | | | | |
| Additional handle for EASY!Lock spray lance: | s 20 | 4.321-380.0 | Comfortable in every situation – the additional handle is easy to attach to the spray lance of our new EASY!Lock generation and makes work easier by allowing you to adjust your posture to suit the particular task. Regularly changing your posture relieves the strain on your body, making work more relaxed. Thanks to the 360°-rotatable spray lance, the additional handle can simply be fully rotated whilst working for greater flexibility. | |
| PowerControl spray lance | | | | |
| PowerControl spray lance 034 | 21 | 4.112-045.0 | Infinitely variable pressure adjustment during operation directly in the operator's gripping area, especially for machines without servo control function. The cleaning performance can be adapted to the respective task in an instant. The low pressure mode for the application of the cleaning agent and the adjustment of the jet level round off the product. | t |
| ROTARY NOZZLES (DIRT BLASTERS) | | | | |
| Dirt Blaster, small | | | | |
| Dirt blaster, small, 035 | 22 | 4.114-019.0 | The new performance dirt blaster (nozzle size 035) with rotating point jet makes a big difference: up to 50% higher cleaning and area performance than its predecessor. | |
| Dirt blaster, large | | | | |
| Dirt blaster, large, 035 | 23 | 4.114-040.0 | The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C. | 2 |
| MULTIPLE-JET NOZZLES | | | | |
| Triple nozzles | | | | |
| Triple nozzle, 032 | 24 | 4.117-027.0 | Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For machines with an injector, the low-pressure flat stream is useful for cleaning agent suction and application. | |
| HIGH-PRESSURE HOSES | | | | |
| Standard with unions on both sides | | | | |
| High-pressure hose, 10 m, 250 bar, 2 × EASY!Lock | 25 | 6.110-034.0 | 10 m long high-pressure hose with EASY!Lock manual screw fitting on both sides. Nominal size DN 6, suitable up to 250 bar. | |
| | 26 | 6.110-035.0 | 10 m long high-pressure hose (DN 6) equipped with EASY!Lock manual screw fitting on both sides. Suitable up to 250 bar and with ANTI!Twist. | |
| High-pressure hose, 10 m, 300 bar, 2 × EASY!Lock | 27 | 6.110-056.0 | High-pressure hose (DN 6) equipped with ANTI!Twist and the new EASY!Lock manual screw fitting on both sides. For pressures up to 300 bar. 10 m long. | |
| High-pressure hose, 10 m, 315 bar, | 28 | 6.110-031.0 | High-pressure hose (DN 8) suitable up to 315 bar pressure. With innovative EASY!Lock manual | |

■ Included in the scope of supply. □ Available accessories.

ACCESSORIES FOR HD 5/15 C PLUS 1.520-931.0















| | 1 | | | - |
|---|----|-------------|--|-----|
| | | | | |
| | | Order no. | Description | |
| HIGH-PRESSURE HOSES | | | | |
| Standard with unions on both sides | | | | |
| High-pressure hose, 15 m, 315 bar, 2 × EASY!Lock | 29 | 6.110-030.0 | 15 m long high-pressure hose, DN 8, with ANTI!Twist and time-saving EASY!Lock manual screw fitting on both sides. | |
| High-pressure hose, 20 m, 315 bar, 2 × EASY!Lock | 30 | 6.110-032.0 | 20 m long high-pressure hose (DN 8) equipped with the time-saving and robust EASY!Lock manual screw fitting on both sides. Approved for pressures up to 315 bar. | |
| High-pressure hose, 30 m, 315 bar, 2 × EASY!Lock | 31 | 6.110-014.0 | Comfortable length (30 m) and innovative EASY!Lock manual screw fitting: High-pressure hose (DN 8) with ANTI!Twist for pressures up to 315 bar. | |
| High-pressure hose, 15 m, 220 bar, 2 × EASY!Lock | 32 | 6.110-042.0 | Equipped with innovative EASY!Lock manual screw fitting and suitable for pressures up to 220 bar: 15 m long high-pressure hose (DN 10). | : 🗆 |
| High-pressure hose, 20 m, 220 bar, 2 × EASY!Lock | 33 | 6.110-043.0 | 20 m in length and the extremely time-saving and comfortable EASY!Lock manual screw fitting on both sides are some of the main features of this high-pressure hose (DN 10). | |
| High-pressure hose, 25 m, 220 bar, 2 × EASY!Lock | 34 | 6.110-044.0 | Impressive values and basic equipment: 25 m long high-pressure hose (DN 10) developed for pressures up to 220 bar. | |
| High-pressure hose, 40 m, 220 bar, 2 × EASY!Lock | 35 | 6.110-045.0 | 40 m long high-pressure hose with EASY!Lock system for the time-saving manual screw connection (both sides). Nominal size (DN) 10, working pressure up to 220 bar. | |
| High-pressure hose, 15 m, 210 bar, 2 × EASY!Lock | 36 | 6.110-059.0 | Designed for working pressures up to 250 bar: High-pressure hose (DN 12) with a length of 15 m. Has the comfortable EASY!Lock manual screw fitting on both sides. | |
| High-pressure hose, 40 m, 210 bar, 2 × EASY!Lock | 37 | 6.110-060.0 | With EASY!Lock manual screw fitting and lots of room for manoeuvre thanks to 40 m in length: High-pressure hose (DN 12) with EASY!Lock manual screw fitting on both sides. Suitable for working pressures up to 250 bar. | |
| High-pressure hose, 10 m, 220 bar, 2 × EASY!Lock | 38 | 6.110-041.0 | Impressive values and basic equipment: 25 m long high-pressure hose (DN 10) developed for pressures up to 220 bar. | |
| Longlife 400 with unions on both sides | | | | |
| High-pressure hose Longlife, 1,5 m, 400 bar, 2 × EASY!Lock | 39 | 6.110-024.0 | 1.5 m short high-pressure hose (DN 8). Comfortable EASY!Lock manual screw fitting on both sides for robust and quick connections. Durable and designed for up to 400 bar pressure. | |
| High-pressure hose Longlife, 1,5 m, 400 bar, 1 × EASY!Lock / 1 × M22 × 1.5 | 40 | 6.110-069.0 | 1.5 m long high-pressure hose (DN 8) suitable for up to 400 bar pressure with double steel core. Connections: M 22 × 1.5, as well as the comfortable and quick EASY!Lock manual screw fitting. | |
| High-pressure hose Longlife, 10 m, 400 bar, 2 × EASY!Lock | 41 | 6.110-038.0 | Durable, 10 m long high-pressure hose (DN 8) with double steel core and EASY!Lock manual screw fitting on both sides and ANTI!Twist. Approved for 400 bar pressure. | |
| High-pressure hose Longlife, 30 m, 400 bar, 2 × EASY!Lock | 42 | 6.110-023.0 | Robust high-pressure hose with double steel core, ANTI!Twist and EASY!Lock manual screw fitting on both sides. Nominal size DN 8, 30 m long, for up to 400 bar pressure. | |

ACCESSORIES FOR HD 5/15 C PLUS 1.520-931.0







| | | Order no. | Description | |
|---|--------|-------------|---|-----|
| HIGH-PRESSURE HOSES | | | | |
| Longlife 400 with unions on both sides | | | | |
| High-pressure hose Longlife, 20 m, 400 bar, 2 × EASY!Lock | 43 | 6.110-027.0 | High-pressure hose with ANTI!Twist, EASY!Lock manual screw fittings and double steel core. 20 m long, nominal size DN 8, EASY!Lock manual screw fitting on both sides. | |
| High-pressure hose Longlife, 15 m, 400 bar, 2 × EASY!Lock | 44 | 6.110-029.0 | The double steel core ensures a particularly long life of this 15 m long high-pressure hose (DN 8), which is approved for pressures up to 400 bar. | C |
| Food industry version with unions on both side | es | | | |
| High-pressure hose food grade, 15 m, 250 bar, 2 \times EASY!Lock | 45 | 6.110-063.0 | 15 m long high-pressure hose (ID 6), food grade, with AVS hose reel connection, EASY!Lock hand screw connection and grey, non-marking outer covering. | |
| High-pressure hose food grade, 10 m, 250 bar, 2 × EASY!Lock | 46 | 6.110-051.0 | High-pressure hose (ID 6), 10 m long, with grey, non-marking outer covering. Approved for use in the food industry. With quick and robust EASY!Lock hand screw connection at both ends. | |
| High-pressure hose food grade, 20 m, 250 bar, 2 × EASY!Lock | 47 | 6.110-052.0 | Suitable for use in food industry: 20 m long high-pressure hose (ID 8) with grey, non-marking outer covering, ANTI!Twist and EASY!Lock hand screw connections. | r 🗆 |
| Longlife food design with screw connections at | t both | ends | | |
| High-pressure hose food grade Longlife, 10 m, 400 bar, 2 \times EASY!Lock | 48 | 6.110-053.0 | With blue, non-marking and animal fat resistant outer covering: durable high-pressure hose (ID 8), 10 m long, ANTI!Twist and EASY!Lock hand screw connection at both ends. | |
| High-pressure hose food grade Longlife, 20 m, 400 bar, 2 × EASY!Lock | 49 | 6.110-054.0 | Durable high-pressure hose with double steel reinforcement and blue, non-marking and animal fat resistant outer covering. 20 m long with EASY!Lock hand screw connections. | |
| Special hoses | | | | |
| High-pressure hose curved, 1.5 m, 400 bar, 1 × EASY!Lock / 1 × M22 × 1.5 | 50 | 6.110-068.0 | For connection to hose reels: high-pressure hose, with M 22 \times 1.5 connection and curved EASY!Loc hand screw connection. 1.5 m long, suitable for up to 400 bar working pressure. | k∟ |
| POWER GENERATOR | | | | |
| PGG 6/1 | 51 | 1.042-208.0 | With a power rating of 5 kW, the petrol-operated synchronous generator PGG 6/1 impresses with up to 10 hours of independent power supply in many commercial and municipal applications. | |
| KÄRCHER POWER NOZZLE | | | | |
| HP nozzle spray angle 0° | | | | |
| Power nozzle 0°, 040 | 52 | 2.113-001.0 | High-pressure nozzle with powerful jet for extremely stubborn dirt. | |
| Power nozzle spray angle 15° | | | | |
| Power nozzle 15°, 034 | 53 | 2.113-042.0 | Flat jet nozzle for stubborn dirt. | |
| Power nozzle spray angle 25° | | | | |
| Power nozzle 25°, 034 | 54 | 2.113-000.0 | Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains. | |
| Power nozzle spray angle 40° | | | 1 | - |
| Power nozzle 40°, 040 | 55 | 2.113-003.0 | Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces. | |
| NOZZLE UNION / SPACER | | | | |
| Nozzle union | | | | |
| Nozzle screws | 56 | 4.112-011.0 | Nozzle screws with protectors for high-pressure and power nozzles | |
| | | | • | |

ACCESSORIES FOR HD 5/15 C PLUS 1.520-931.0





Т



Т











| | | Order no. | Description | |
|--|----|-------------|---|--|
| PIPE CLEANING | | | | |
| Pipe cleaning hose, ID 6 | | | | |
| Pipe cleaning hose, ID 6, 10 m, max. 250 bar | 57 | 6.110-046.0 | The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8). | |
| Pipe cleaning hose, ID 6, 20 m, max. 250 bar | 58 | 6.110-008.0 | The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8). | |
| Pipe cleaning hose, ID 6, 30 m, max. 250 bar | 59 | 6.110-047.0 | The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8). | |
| Pipe cleaning hose, ID 6, 10 m, max. 140 bar | 60 | 6.110-048.0 | 10 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle). | |
| Pipe cleaning hose, ID 6, 20 m, max. 140 bar | 61 | 6.110-049.0 | The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8). | |
| Pipe cleaning hose, ID 6, 30 m, max. 140 bar | 62 | 6.110-050.0 | 30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle). | |
| Pipe cleaning nozzle | | | | |
| Pipe cleaning dirt blaster D21/040 | 63 | 4.765-001.0 | The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted | |
| Pipe cleaning dirt blaster D30/040 | 64 | 4.765-004.0 | jets ensure the necessary forward movement, as well as convenient handling. | |
| Pipe cleaning nozzle | 65 | 5.763-015.0 | 16 mm pipe cleaning nozzle with internal thread. Various jet directions for | |
| | 66 | 5.763-020.0 | environmentally-friendly cleaning of blocked drains and pipes. | |
| | 67 | 5.763-017.0 | Pipe cleaning nozzle with inner thread. Different spray directions. The hose moves freely through the pipe. (R $1/8$ " connection, 3 × 30° backwards, diameter 30 mm.) | |
| Rotating pipe cleaning nozzle | 68 | 6.415-428.0 | Pipe cleaning nozzle with four rotating jets and inner thread. Different spray directions. The hose moves freely through the pipe. With R 1/8" connection. | |
| FLOOR AND HARD SURFACE CLEANER | | | | |
| FR Classic surface cleaner | | | | |
| FR Classic surface cleaner | 69 | 2.111-016.0 | The ideal entry-level model in the Kårcher surface cleaner range for cleaning surfaces indoors and outdoors. With splash guard and up to 150 bar working pressure. | |
| Hard Surface Cleaner FRV 30 | | | | |
| Rubber lip for FRV 30 | 70 | 2.642-910.0 | For smooth floors indoors. The squeegee increases the suction performance of the FRV 30 and minimises the amount of water remaining. This means the floor is dry in just a few minutes. | |

ACCESSORIES FOR HD 5/15 C PLUS 1.520-931.0

| 71, 80 | 72 | 73 | 74 | 75 | 76 | 0 |
|--------|----|----|----|----|----|---|
| | 79 | 81 | 82 | 83 | 84 | |

| FLOOR AND HARD SURFACE CLEANER Hard Surface Cleaner FRV 30 Extension hose 5 m | | Order no. | | 4-4 |
|---|----|-------------|---|-----|
| | | | | |
| Extension hose 5 m | | | | |
| | 71 | 4.440-939.0 | 5m extension hose for FRV 30. Connection sleeve included. | |
| Hose fastening attachment kit | 72 | 2.642-528.0 | Suction cup for fixing the suction hose to smooth surfaces. | |
| Dirt trap attachment kit | 73 | 2.642-532.0 | Galvanised steel bucket for collecting coarse dirt and for fixing the suction hose in outside areas. | |
| FRV 30 Surface Cleaner | 74 | 2.111-010.0 | With the integrated, automatic suction of the dirty water, the FRV 30 makes surface cleaning even more efficient and can be used in both inside and outside areas. There is no longer a need to rinse the surface after cleaning, since the dirty water can be discharged through the 5 m suction hose supplied. Additional quality features are the non-marking steering rollers and double ceramic bearing. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 1000 l/h / 60°C. | |
| Hard surface cleaner FR 30 | | | | |
| FR 30 Surface Cleaner | 75 | 2.111-011.0 | Up to 10 times greater area performance compared with the conventional high-pressure jet. Plastic casing for optimal manoeuvrability, double ceramic bearing for long working times, flexible connection joint for optimal handling and integrated parking position. Machine-specific nozzle kit must be ordered separately. Max. 180 bar / 850 l/h / 60° C. | |
| FR 30 Me surface cleaner | | | | |
| Hard Surface Cleaner FR 30 Me | 76 | 2.111-013.0 | Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry. | |
| Machine-specific nozzle kits for FR | | | | |
| Nozzle kit for FR, 450 l/h – 500 l/h | 77 | 2.640-482.0 | Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (450 to 500 l/h). | |
| Machine-specific nozzle kits for FRV | | | | |
| Nozzle kit for FRV, 035 | 78 | 2.642-430.0 | Machine-specific nozzle kit with Kärcher power nozzles and jet nozzle for FRV 30. | |
| Machine-specific nozzle kits for FR Classic | | | | |
| Nozzle kit for FR Classic, 034 | 79 | 2.885-313.0 | Nozzle kit specifically for FR Classic surface cleaner. | |
| FRV 30 Me surface cleaner | | | | |
| Extension hose FRV 30 Me and FRV 50 Me | 80 | 4.441-040.0 | 5 m extension hose for FRV 30 Me. Includes connecting adapter. | |
| FRV 30 Me Surface Cleaner | 81 | 2.111-012.0 | Thanks to automatic suction of the dirty water, the stainless steel FRV 30 Me Surface Cleaner makes surface cleaning more efficient in both inside and outside areas. Hot water cleaning up to 85°C. | |
| FOAM SYSTEMS | | | | |
| Cup foam lance | | | | |
| Cup foam lance Basic 1, 350 l/h - 600 l/h | 82 | 4.112-053.0 | For high-pressure cleaners with a flow rate of 350–600 l/h: new, robust and very high-quality Basic 1 cup foam lance with outstanding foam quality while consuming half as much cleaning agen | t. |
| 1-litre cleaning agent container for cup foam lance basic | 83 | 5.071-414.0 | For the quick change of the cleaning agent: Additional 1 litre cleaning agent container for basic foam lance (2.112-053.0, 2.112-054.0 and 2.112-055.0). | |
| 1-litre cleaning agent container for cup foam lance advanced | 84 | 6.414-050.0 | Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 2.112-017.0 and 2.112-018.0). | |

ACCESSORIES FOR HD 5/15 C PLUS 1.520-931.0



| | | Order no. | Description | |
|---|--------|-------------|---|--|
| FOAM SYSTEMS | | 1 | | |
| Cup foam lance | | | | |
| Cup foam lance Advanced 1, 400 l/h - 600 l/h | 85 | 4.112-063.0 | High-quality and robust cup foam lance Advanced 1 with spray angle adjustment and main body made of Ecobrass. Suitable for Kärcher high-pressure cleaners with a flow rate of 400 to 600 l/h. | |
| Cup foam lance DUO Advanced 1, 400 I/h - 600 I/h | 86 | 4.112-067.0 | DUO Advanced 1 cup foam lance with two-litre detergent tank and direct switching to high-pressure cleaning. Suitable for Kärcher pressure washers with a flow rate of 400 to 600 l/h. | |
| Inno Foam Kit | | | | |
| Inno Foam Set with detergent injector | 87 | 2.112-000.0 | High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection. | |
| Easy Foam Set | | | | |
| Easy Foam Set with RM injector | 88 | 2.112-010.0 | HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately. | |
| Nozzle kits for Inno/Easy Foam Set | | | | |
| Nozzle kit 055 for Inno / Easy Set 500-600 I/h | 89 | 2.111-009.0 | Optimal adaptation to different machine outputs for economic use. | |
| Foam nozzle mounting kit | | • | | |
| Foam nozzle attachment kit | 90 | 2.112-013.0 | Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary. | |
| MIXERS AND INJECTORS | | | | |
| Cleaning agent injector | | | | |
| Cleaning agent injector for high and low pressure (without nozzles) | 91 | 4.637-032.0 | Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%. | |
| Cleaning agent injector for high pressure (without nozzle) | 92 | 4.637-033.0 | Cleaning agent dosage at high pressure 3 - 5 % | |
| Machine-specific nozzle kit with order no. 4.63 | 87-033 | 3.0 | | |
| Nozzle kit HD 500-700 l/h | 93 | 4.769-005.0 | For HD 500 – 700 l/h. Consists of nozzle insert + HP power nozzle + union | |
| Nozzle insert with order no. 4.637-032.0 | | | | |
| Nozzle insert up to 1,100 l/h - high pressure | 94 | 4.769-003.0 | Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h. | |
| Nozzle insert up to 1,100 l/h - low pressure | 95 | 4.769-001.0 | For low pressure with machines up to 1.100 l/h | |
| QUICK CONNECT | | | | |
| Quick coupling | 96 | 2.115-000.0 | For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 × 1.5 internal thread. | |
| Male coupling | 97 | 2.115-001.0 | Hardened stainless steel male coupling for quick coupling 2.115-000. With M 22 \times 1.5 external thread. | |
| DRUM AND TANK CLEANING | | | | |
| Add-on kit mud sucker | 98 | 2.641-798.0 | For connection to the high-pressure hose of Kårcher high-pressure cleaners: Powerful sludge suction cleaner for the retrofitting of high-pressure cleaners to dirt pumps. | |
| | | | • | |


ACCESSORIES FOR HD 5/15 C PLUS 1.520-931.0




111

| | | Order no. | Description | |
|--|-----|-------------|--|------|
| OTHER HP ACCESSORIES | | | | |
| Starting current limiter | 99 | 2.637-495.0 | Reduces starting current in single-phase supply and protects line fuse. | |
| Jet gun | 100 | 2.869-067.0 | Short set-up time, easy transport, instant switch off - the jet gun is the affordable cleaning method for all kinds of small to medium-sized areas. Adjustable pressure/water volume. | 1 🗆 |
| COUPLING PARTS | | | | |
| Rotary coupling | | | | |
| Rotary coupling | 101 | 4.111-021.0 | Reliably prevents twisting of HP hoses. Connection Easy!Lock. Handle protection | |
| Connector | | | | |
| Screw socket for surface cleaners and Servo Control controllers | 102 | 4.111-022.0 | For attaching high-pressure nozzles and accessory parts to the HD trigger gun (with nozzle screws) – $1 \times M 22 \times 1.5/1 \times M 18 \times 1.5$. | |
| Y distributor | 103 | 4.111-024.0 | Offers the option to connect two spray units to the machine. Installation on the high pressure outlet. | |
| Short spray unit | 104 | 4.111-038.0 | For attaching high-pressure nozzles and accessory parts to HP trigger gun (with nozzle screws). No compatible with triple nozzles. | ot 🗆 |
| EASY!Lock adapter | | | | |
| Adapter 1 M22AG-TR22AG | 105 | 4.111-029.0 | Adapter 1 to connect the old hose with the new hose | |
| Adapter 2 M22IG-TR22AG | 106 | 4.111-030.0 | Adapter 2 to connect the old device with the new hose and the old gun with the new hose | |
| Adapter 3 M22IG-TR22AG | 107 | 4.111-031.0 | Adapter 3 to connect the old gun with the new spray lance and new servo regulator | |
| Adapter 4 TR22IG-D11 | 108 | 4.111-032.0 | Adapter 4 to connect the new gun with the old swivel hose | |
| Adapter 5 TR22IG-M22AG | 109 | 4.111-033.0 | Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance | |
| Adapter 6 TR22IG-M22AG | 110 | 4.111-034.0 | Adapter 6 to connect the new device with the old hose and the old hose with the new gun | |
| Adapter 7 M18IG-TR20AG | 111 | 4.111-035.0 | Adapter 7 to connect the old spray lance with the new nozzle | |
| Adapter 8 TR20IG-M18AG | 112 | 4.111-036.0 | Adapter 8 to connect the new spray lance with the old nozzle | |

ACCESSORIES FOR HD 5/15 C PLUS 1.520-931.0

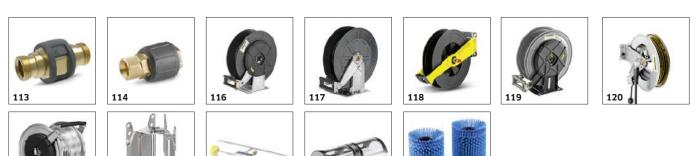

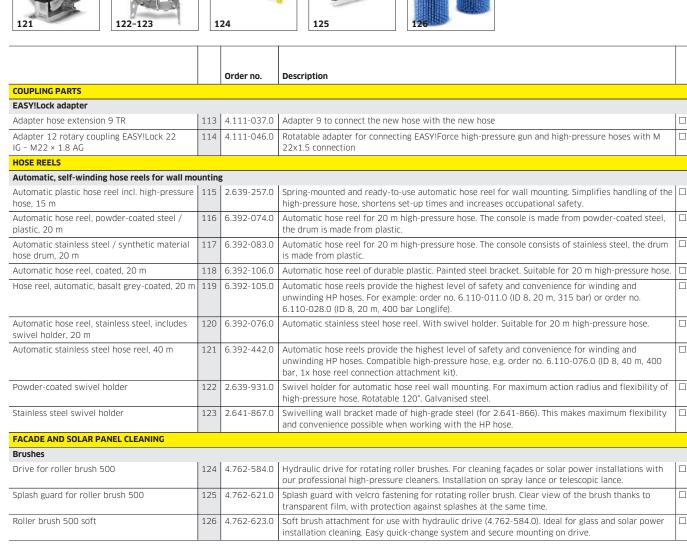

□ Available accessories.

5/15 C Plus, 1.520-931.0, 2023-01-01 ę

ACCESSORIES FOR HD 5/15 C PLUS 1.520-931.0





138





| | | Order no. | Description | |
|---|-----|-------------|---|-----|
| FACADE AND SOLAR PANEL CLEANING | | | | |
| Brushes | | | | |
| Roller brush 500 medium | 127 | 4.762-624.0 | Medium-hard brush attachment for use with hydraulic drive (4.762-584.0). Suitable for sensitive façades, foils and fabrics. Easy and safe quick-change system. | |
| Roller brush 500 hard | 128 | 4.762-625.0 | Hard brush attachment for use with hydraulic drive (4.762-584.0). For rough façades, stone and wooden patios. Safe and easy quick-change system. | |
| Brush hard | 129 | 6.960-133.0 | Brush with hard bristles for cleaning industry facades and floor coverings and removing coarse dirt. Simple installation on telescopic lances or high-pressure lances from Kärcher. | |
| Brush medium | 130 | 6.960-134.0 | Optimally cleans facades, roller shutters and textile fabrics: the brush with medium-hard bristles for fast and simple attachment to telescopic lances or high-pressure lances from Kärcher. | |
| Brush soft | 131 | 6.960-135.0 | For simple installation on telescopic lances or high-pressure lances from Kärcher: brush with soft bristles for deep cleaning of sensitive surfaces such as glass or solar systems. | |
| Telescopic lances | | | | |
| TL low pressure adapter | 132 | 4.580-097.0 | TL low-pressure adapter comprising ball valve for tool-free installation on telescopic lances. Ideal for applications with rotating high-pressure brushes. | |
| Telescopic lance TL 7 F | 133 | 4.762-609.0 | Telescopic lance TL 7 F with up to 7 m reach made from robust and lightweight glass fibre. With practical quick-release fasteners for simple retraction and extension. | |
| Telescopic lance TL 7 H | 134 | 4.762-610.0 | Multifunctional hybrid telescopic lance TL 7 H made of rigid and lightweight carbon-glass fibre mix Telescopic thanks to quick-release fastenings. Up to 7 m reach. | . 🗆 |
| Telescopic lance TL 10 H | 135 | 4.762-611.0 | Up to 10 m reach: hybrid telescopic lance TL 10 H. Comprising carbon-glass fibre mix and suitable for multifunctional use. Simple retraction and extension thanks to quick-release fasteners. | |
| Telescopic lance TL 10 C | 136 | 4.762-612.0 | Carbon fibre telescopic lance TL 10 C. With up to 10 m reach and practical quick-release fasteners. Multifunctional use for cleaning facades, windows or solar panels. | |
| Telescopic lance TL 14 C | 137 | 4.762-613.0 | Maximum rigidity with minimum weight: telescopic lance TL 14 C made from carbon fibre. Enormous reach of 14 m, multifunctional use and easy to use thanks to quick-release fasteners. | |
| TL high pressure adapter | 138 | 4.775-154.0 | TL high-pressure adapter, flexible high-pressure gun for high-pressure cleaning with telescopic lances. Ergonomic, easy to install, suitable for right- and left-handed individuals. | |
| WET BLASTING ATTACHMENT | | | | - |
| Wet blasting attachment (without nozzle) | | | | |
| Wet blasting attachment with flow control (without nozzles) | 139 | 4.115-000.0 | Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. | |
| Wet blasting attachment without flow control (nozzles not included) | 140 | 4.115-006.0 | Addition of spray agent to the high pressure jet. For paint stripping, rust removal and descaling. Assembly on spray lance instead of high-pressure nozzle. Without water flow regulation | |

ACCESSORIES FOR HD 5/15 C PLUS 1.520-931.0



151















| | | Order no. | Description | |
|--|-----|-------------|--|-----|
| WET BLASTING ATTACHMENT | | | | |
| Nozzle kits for wet jet unit | | | | |
| Nozzle kit for wet jet unit 035 | 141 | 2.112-021.0 | Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment 4.115-000.0 4.115-006.0. | |
| Boron carbide nozzle | | | | _ |
| Boron carbide nozzle, for machines up to 1,000 l/h | 142 | 6.415-084.0 | In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation. | |
| WATER CONNECTION | | | | |
| Geka coupling | | | | |
| Geka connector with hose barb, R 1/2" | 143 | 6.388-461.0 | with hose liner | |
| Geka connector with hose barb, R 3/4" | 144 | 6.388-455.0 | | |
| Geka connector with hose barb, R 1" | 145 | 6.388-465.0 | with hose barb | |
| Geka connector with inner thread, R 3/4" | 146 | 6.388-473.0 | with female thread | |
| Suction filter | | | | |
| Water suction filter | 147 | 6.414-956.0 | Suitable for ponds, storage tanks or similar, polyamide filter casing, stainless steel strainer, 800 μn mesh, R 3/4" and R 1" connection, without non-return valve | n 🗆 |
| Suction filter with check valve | 148 | 4.730-012.0 | Brass suction filter suitable for ponds, storage tanks, etc. With check valve. | |
| Water fine filter | | | | |
| Universal water fine filter, 25 μm | 149 | 2.637-020.0 | Water fine filter, mesh size 25 μ m, max. temperature 50 °C. Protects the machine from small dirt particles in the water. Water volume up to 1200 I/h. 3/4" connection, with 1" adapter. | |
| Water fine filter, with adapter | 150 | 4.730-102.0 | Fine-mesh water filter, 125μ m, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connection 3/4", with adapter 1". | r, |
| Water supply hose | | | | |
| Water supply hose | 151 | 4.440-038.0 | NW 13 R1" / R 3/4", up to 30 °C | |
| | 152 | 4.440-207.0 | NW 19 R1" / R 3/4", up to 85 °C, for pick-up | |
| Backflow check valve | | | | _ |
| Backflow preventer | 153 | 2.641-374.0 | To prevent detergent getting into the drinking water cycle in case of inlet at low-pressure. - hot water resistant up to 80 °C - tested according to IEC 60335-2-79 - integrated leakage protection | |
| WASHING BRUSHES | | | | |
| Push-on washing brush | | | | |
| Push-on wash brush | 154 | 4.762-497.0 | The wash brush is fitted directly onto the devices' new dual and triple nozzles using clamping. | |

ACCESSORIES FOR HD 5/15 C PLUS 1.520-931.0



| | | | | _ |
|---|-----|-------------|--|---|
| | | | | |
| | | Order no. | Description | |
| WASHING BRUSHES | | | | |
| Push-on washing brush | | | | |
| Push-on wash brush | 155 | 4.113-001.0 | For universal use for surface cleaning. Mounted using clamp directly at the spray lance. TR thread connection | |
| Rotating washing brush | | • | | |
| Rotating wash brush for < 800 l/h machines, nylon bristles | 156 | 4.113-004.0 | The rotating wash brush gently removes fine dust and traffic film from all surfaces. Temperature resistant up to 60° C. (M 18 × 1.5, replaceable brush insert). | |
| Rotating wash brush for < 800 l/h machines, natural bristles | 157 | 4.113-003.0 | Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60° C, M 18 × 1.5 (replaceable brush insert). | |
| HOSE REELS | | | | |
| Automatic hose reel, powder-coated steel / plastic, 20 m | 158 | 9.549-009.0 | | |
| SPRAY LANCES | | | | |
| Flexible lance, 1050 mm | 159 | 9.549-017.0 | | |
| | - | | 1 | |